




## Quick Guide

[www.thehovercam.com](http://www.thehovercam.com)  
[facebook/hovercam.com](https://facebook.com/hovercam.com)


Included In The Package:



HoverCam T3/T5/T5V



Bumper  
(optional)




Positioning Mat



USB Cable


Page.1

Latch automatically snaps into lock position when upper tube is fully extended. Press on it to release

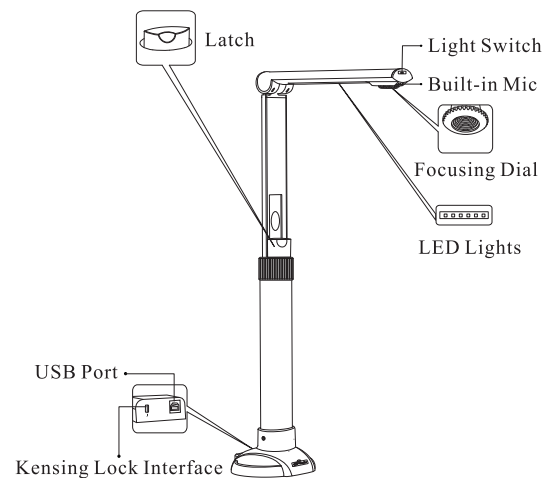


Page.2

Pull the camera all the way up  
Latch will automatically snaps into lock position

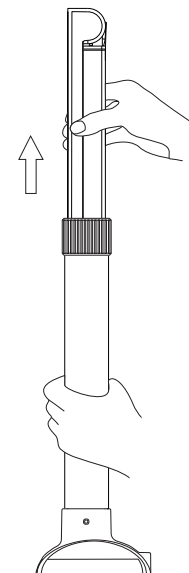


Page.3

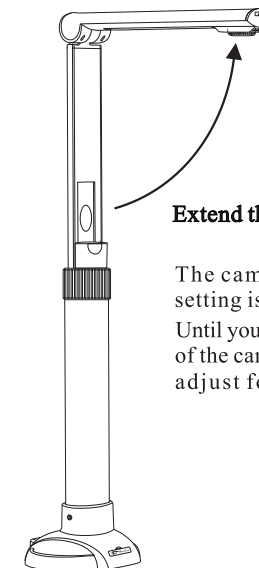

Extend the camera arm to right angle

The camera's factory default setting is in focus at this height. Until you need to lower the height of the camera, there is no need to adjust focus.

Page.4

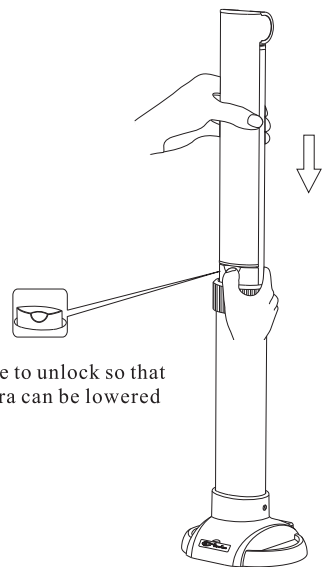


Press here to unlock so that the camera can be lowered

Page.5

### Connect your Hovercam to a PC or a Mac


The Bumper and the Positioning Mat can be used later to position documents properly.

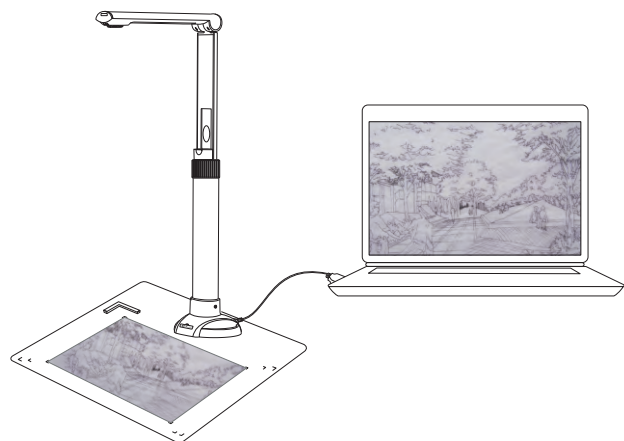

Page.6

### Install Software

The HoverCam comes with the software on a CD or stored in the built-in flash memory. Upon inserting the CD or plugging in the USB cable, an installation screen should present you with options of what software to install. If this screen does not appear, please find the "Hovercam Software" flash drive under "My Computer" on a PC, or locate the disk volume on Mac, and install HoverCamFlex or HoverCam Express software.

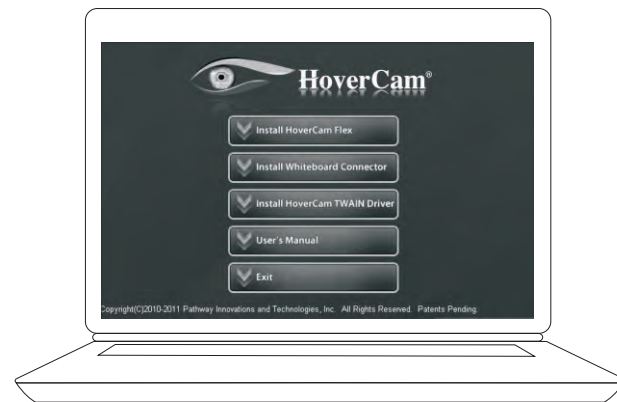


Page.7

Run HoverCam Flex or Express software. Please follow the on screen guide to use the software.



Page.8

If necessary, you may adjust the height of the camera to zoom. You may need to adjust the focus afterward as well.

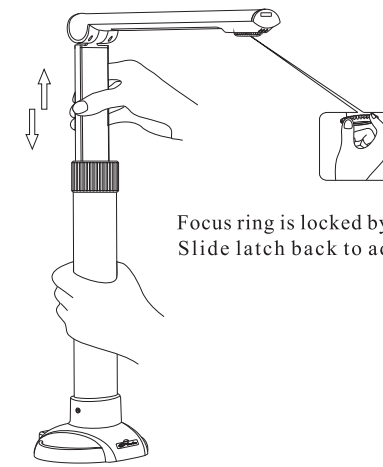

Focus ring is locked by a sliding latch  
Slide latch back to adjust focusing

Page.9